

TECHNOLOGY
FOR CARPET
YARNS



JUTE REPLACEMENT YARN TECHNOLOGY

Our Polypropylene **Weft** and **Warp** yarns, twisted or untwisted are made to very tightly controlled shrinkage specifications enabling the carpet to be processed through the latex finishing operation without fear of shrinkage. The uniformity of the yarn ensures smooth running and reduces stoppages caused by yarn breaks.

Present product **Tex** range is from **55 Tex - 1.100 Tex**.

Our Product Profile is as follows ;


Weft Yarn	150 Tex - 1.100 Tex
Warp Yarn	91 Tex - 185 Tex
Tape Yarn (Untwisted)	55 Tex - 1.100 Tex

- ✓ High Strength
- ✓ High Performance
- ✓ Low Shrinkage
- ✓ **UV** Stabilised




WEAVE TYPES

AXMINSTER

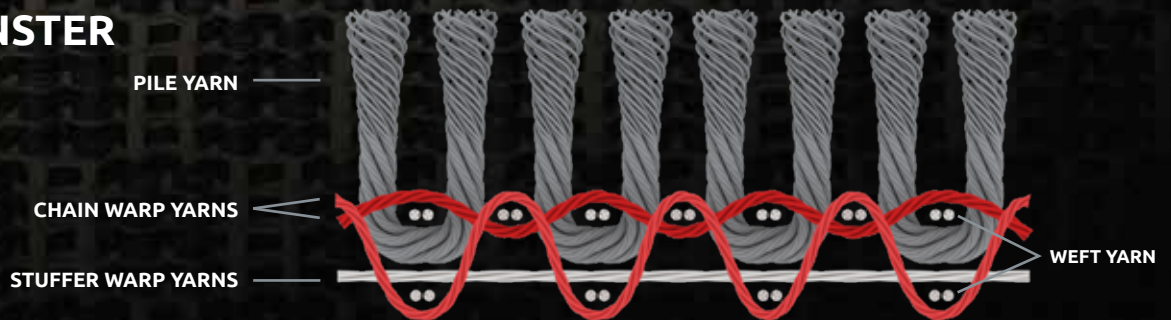

WILTON

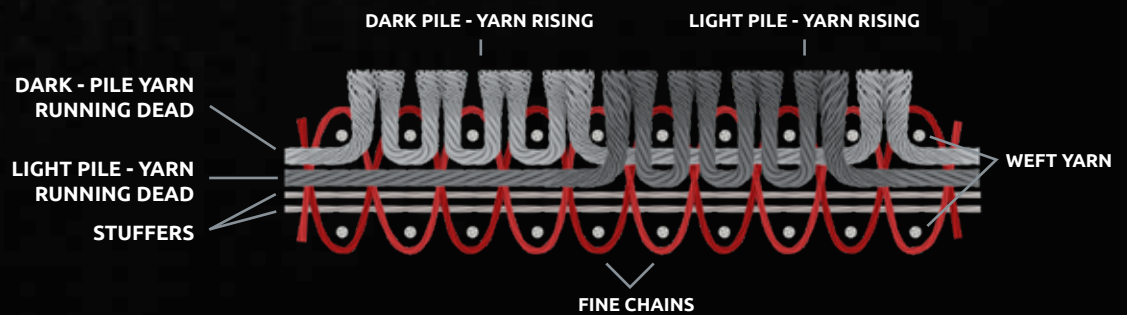

AIR TEXTURED

Air Textured Yarn is a type of polyester filament yarn produced by processing through a texturing process. This process disperses, curls and entangles the filaments composing the **POY** yarn. This gives a textured appearance. **Air Textured Yarn** is used to **Woven Rug Warps** and Secondary backing **Weft**.

Present product **Denier** range is from **600 Denier - 2.100 Denier**

Our Product Profile is as follows ;

Tight Warp	1.350 Denier - 2.100 Denier
Slack Warp	600 Denier - 1.100 Denier
Secondary Backing (Low Shrinkage)	1.050 Denier - 1.425 Denier





For outdoor **Carpet and Rug** applications.



Flame Retardant Yarns.



Recyclable product.



Resistant to water and bacterial.

Bulut Polyester & Sentetik

Başpınar OSB Mah. 2. Bölge 83206 Nolu Cad. No: 3 Gaziantep / TURKEY

☎ +90 342 337 32 26 📠 +90 342 337 32 40 ✉ info@bulutsentetik.com

www.bulutsentetik.com